

GAS TECHNOLOGY SYSTEM TOPDEX TGN-50

**FEATURES:**

1. Integrated nail magazine with spring lock for quick and easy loading.
2. Nail magazine holds 33 nails and equips with dust-proof guard to avoid dust get into nail feeder
3. A high driving power of 100 Joules lets the nail penetrate through 6mm steel easily
4. New designed slender nosepiece allows working in hard-to- reach spaces
5. Equipped with pushing nose cap with two different depths for different nail depth , and anti-skid for nosepiece.
6. Modular design for easy clean & maintenance
7. Low battery indicator light alerts the user of battery status
8. Dry-Fire lockout prevents accidental dry-fire
9. Over-Molded Grip for comfort and control
10. Drives approx. 1,100 nails per fuel cell
11. Drives approx. 9,000 nails per battery charge

USES: Topdex TGN-50 is the right system for interior finishing top performance in hard and old concrete, as well as standard concrete and steel. This is the most technologically advanced gas tool on the market.

SPECIFICATION

Type of power	Piston reciprocating
Dimensions	438mm(L)x370mm(H)x122mm(W)
Weight	4.2 kg include battery
Power	100 Joule
Actuation Pressure	5 kg
Available Nails	Plastic strip nails
Nail length	15mm ~40mm
Shank diameter	2.6mm~3.05mm
Magazine capacity	33 nails (3-strip)
Cycle Rate	1~2 nails/second
Battery Pack	Li-ion 7.2V 1.5Ah
Charge time	2.5hrs
Fuel cell life	1100 nails fer fuel cell
Using temperature	-5°C ~ 50°C




STANDARD ACCESSORIES



Description	Quantity
Li-ion 7.2V 1.5Ah battery	02
Charger	01
Adapter	01
Allen wrench for M5 Screw	02
Safety Glasses	01
Lubricant Oil	01
Case/Bag	01

NAILS FOR STEEL AND HARD CONCRETE

Material	High Carbon Steel
Diameter	2.6mm ~ 3.05mm
Length	NC3-15(15mm), NC3-17(17mm), NC3-22(22mm), NC3-27(27mm), NC3-32(32mm)
Order Quantity	1000

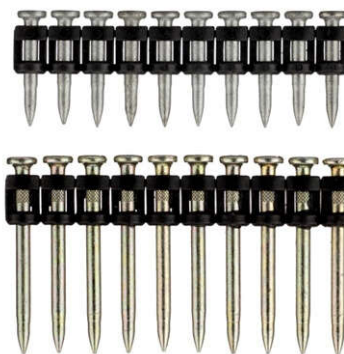

FUEL CELL

Model No.	G165
Size	D31.5mmxL165mm
Content	Propane + Butane
Pressure	16 ~ 18bar
Net Weight	40g / 80ml
Shots Qty	Around 1100 shots
Using temperature	-5°C ~ 50°C

